

AL-GT-MA Series
LED Area Flood Light

Features

- Ultimate 1 for 1 replacement for 1Kw(1,000W) HID Lights
- Excellent cooling structure
- Unrivalled efficacy of 130 lumens per watt
- Great light distribution and thermal design with good natural convection
- Lower installation cost by replacing existing lamps

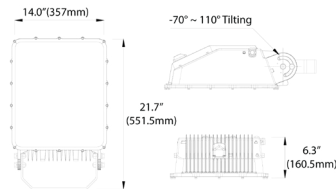
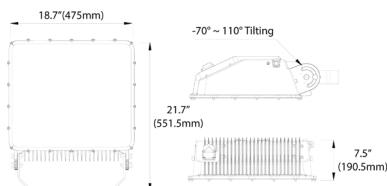
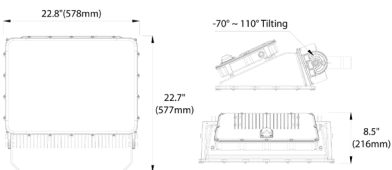
Applications

- Ports
- Airplane Hangars
- Sporting Facilities
- Parking lots

Certifications

Fixture Details

Model Name	MA200	MA300	MA400
Power Consumption	200W	300W	400W
Luminous Efficacy	> 130 lm/W	> 130 lm/W	> 130 lm/W
Luminous Flux	26,000 lm	39,000 lm	52,000 lm
Color Temperature	5000K		
Color Rendering	> 80 Ra		
Life Time Rating	> 100,000 Hours		
Input Voltage	100 - 277 VAC 347 - 480VAC		
Frequency	50 / 60Hz (47 - 63Hz)		
Operation Temperature	-22°F - 140°F (-30°C - 60°C)		
Size (W x L x H)	14.1" x 21.7" x 6.3"	18.7" x 21.7" x 6.3"	22.7" x 22.7" x 8.5"
Weight	22.1lbs (10Kg)	33.1lbs (15Kg)	44lbs (20Kg)
Body	Cast Aluminum		
Cover	Tempered Glass 4.0T (Clear)		
IP Rating	IP66		
Mounting Options	Swivel bracket / Pole bracket		

Dimensional Drawings
AL-GT-MA200

AL-GT-MA300

AL-GT-MA400

Ordering Guide

Series	Wattage	CCT	Driver	Options
AL-GT-MA	200: 200W 300: 300W 400: 400W	5: 5,000K	U: 120 - 277V	CORD: Power Cord Whip PLUG: (Specify)

Adding an Abaco Lighting approved motion sensor system to your lighting upgrade project will further enhance energy savings and create an even faster payback. Specifications are subject to change with or without notice.