

AL-GT-WA Series
LED Wall Packs

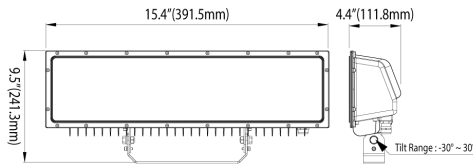
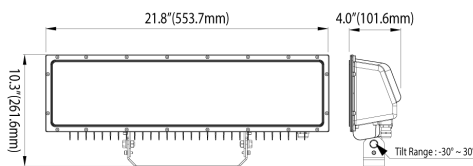
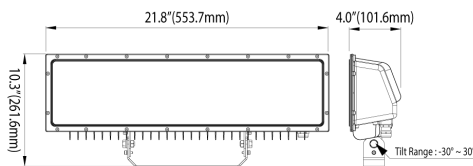
Features

- Easy one-for-one replacement with existing fluorescent and HID Wall packs
- 50% + Power Savings
- Provides excellent light distribution and uniformity.
- Long life LED solution ensures lower maintenance costs.
- Multiple mounting options available
- High-quality construction delivers 125 lm per watt efficiency and excellent thermal characteristics

Applications

- Manufacturing / warehouse
- Factories
- Outdoor / Exterior
- Flood Light Applications
- Billboard/Roadway
- Parking lot Lighting

Certifications

Dimensional Drawings
WA50

WA75

WA100

Fixture Details

Model Name	WA50	WA75	WA100
Power Consumption	50W	75W	100W
Luminous Efficacy	> 125 lm/W	> 125 lm/W	> 125 lm/W
Luminous Flux	> 6,250 lm	> 9,375 lm	> 12,500 lm
Color Temperature	5000K		
Color Rendering	> 80 Ra		
Light Distribution Type	Asymmetric Wide		
BUG Rating	B1 - U1 - G2		
Life Time Rating	>100,000 Hours		
Input Voltage	100 - 277 VAC		
Frequency	50 / 60Hz (47 ~ 63Hz)		
Operation Temperature	-22 °F - 140 °F (-30 °C - 60 °C)		
Size (W x L x H)	15.4" X 9.5" X 4.4"	21.8" X 10.3" X 4.0"	21.8" X 10.3" X 4.0"
Weight	7.1lbs (3.2Kg)	9.3lbs (4.2Kg)	9.3lbs (4.2Kg)
Body	Cast Aluminum		
Optics	Silver Coating Reflector		
Cover	Tempered Glass 3.2T (Clear)		
Finish	Powder Coating		
IP	IP66		
Mounting Options	Swivel Bracket / Wall Mount / Pole Mount		

Ordering Guide

Series	Wattage	CCT	Driver	Options
AL-GT-WA	50: 50W 75: 75W 100: 100W	5: 5,000K	U: 120 - 277V	CORD: Power Cord Whip PLUG: (Specify)

Adding an Abaco Lighting approved motion sensor system to your lighting upgrade project will further enhance energy savings and create an even faster payback

Specifications are subject to change with or without notice.