

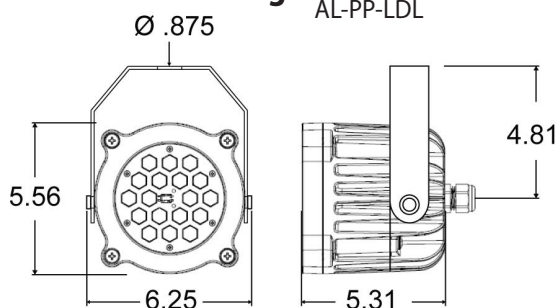
AL-PP-LDL Series
LED Dock Light

Features

- Wet Location fixture rated IP65 & IP66
- Tempered glass lens resists breakage and reduces replacement and maintenance costs
- Instant re-start, no warm-up times or reduced light output in cold environments
- L70 (70% lumen maintenance) at 50,000 hours reduces life cycle maintenance costs
- Up to 72 lumens per watt
- Color Rendering Index (CRI) > 70
- Made in USA. Meets ARRA & Buy American requirements
- Standard tempered glass lens, optional clear polycarbonate lens
- Steel yoke mount
- Input Voltage Range: 120-277 VAC
- UL listed for U.S. and Canada. Tested to UL 1598 & UL 8750 standards
- DesignLights Consortium® (DLC) qualified
- Five (5) year warranty.

Applications

- Tractor trailers up to 53' for loading and unloading
- Manufacturing facilities
- Warehouse facilities
- Industrial facilities
- Loading docs
- Under awnings
- Cold storage
- Landscape
- Signage

Dimensional Drawings

Arm Extensions (Sold Separately)
 AL-DL40 AL-DSDL40

Fixture Details

Model Name	LDL-14W	LDL-16W	LDL-20W	LDL-21W
Power Consumption	14 watt	16 watt	20 watt	21 watt
Luminous Efficacy	61 lm/w	72 lm/w	68 lm/w	71 lm/w
Luminous Flux	860 lm	1,160 lm	1,370 lm	1,500 lm
Color Temperature	5000K			
Color Rendering	> 70 CRI			
Life Time Rating	50,000 Hours			
Input Voltage	120 - 277V AC			
Operating Temp.	-22°F ~ 113°F (-30°C ~ 45°C)			
Weight	8lbs (3.63Kg)			
Body	Tempered Glass lens with die-cast aluminum body			
Options	(AL-DL40) 40" Dock arm, (AL-DSDL40) 40" Swing arm			

Certifications

Ordering Guide

Series	Wattage	Optics	CCT	Driver Voltage	Cord Plug	Other
AL-PP-LDL	14W: 14 watt 16W: 16 watt 20W: 20 watt 21W: 21 watt	SP: 12° Spot (Standard) DSP: 32° Diffused Flood	5K: 5,000K	UL: Universal 120-277VAC	C6: 6' Cord, No Plug	Blank: Tempered Polycarbonate Lens CP: Clear Polycarbonate Lens

Adding an Abaco Lighting approved motion sensor system to your lighting upgrade project will further enhance energy savings and create an even faster payback. Specifications are subject to change with or without notice.