

CXTE: LED Exit/Incandescent Emergency Combo

Project:	
Type:	
Catalog #:	



Features

- Energy-efficient LED technology in EXIT sign
- EZ snap-out chevron directional indicators
- Combines an EXIT sign & emergency light into one low-profile unit
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

Electrical

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V, 4.5Ah, sealed lead acid, maintenance-free, rechargeable battery
- Internal solid-state transfer switch automatically connects the internal battery to LED Board/lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Universal surface mount, wall or ceiling, with EZ-snap thermoplastic mounting canopy, which snaps into place making installation quick & easy.

Housing

- Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic in white or black finish

Options

- SDT: Self-Diagnostic (option SDT) continually diagnoses unit's performance and tests system (auto battery discharge once every 30 days and once every 12 months) to ensure reliable operation and to meet electrical and life safety codes
- Using the optional internal heater (-HTR) enables the unit to be used in cold environments (contact customer service for more information).

Illumination

- Standard with two 5.4 watt tungsten fully adjustable, glare-free incandescent emergency lighting heads
- High-performance smooth thermoplastic reflector and plastic lens for optimal light distribution
- Ultra bright, energy efficient, long-lasting Red or Green LED (exit sign illumination)




SALIDA faceplates also available.

Warranty

- Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years.

Dimensions

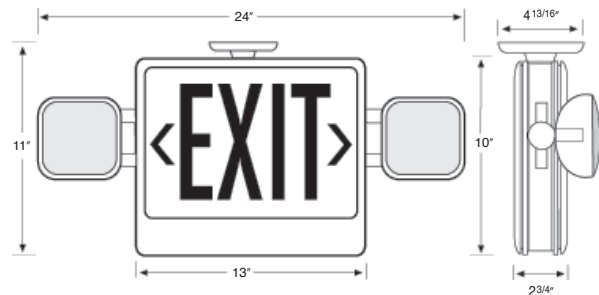

ORDERING INFORMATION



Model	Face #	Letter Color	Housing Color	Battery	Options
CXTE	U2 - Universal	R - Red	W - White	Blank - EM (Standard)	SDT - Self Diagnostics
	Single/Double	G - Green	B - Black		RC - Remote Capable (22W Total)
					KR9 - 9 W Krypton Lamps (RC Only)
					KR5 - 5.4 W Krypton Lamps
					HTR - Internal Heater

Model	Face #	Letter Color	Housing Color	Battery	Options