

# R-16HO: High-Output, Remote Capable Thermoplastic Emergency Light with MR-16 Halogen Lamps

<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	



## Features

- Compact, low-profile design in neutral finish
- Universal mounting plate with EZ Quick Connect for fast installation
- Remote Capable
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

## Electrical

- Unit can operate a total of 20W for a minimum of 90 minutes
- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V, 7.2Ah, sealed lead acid, maintenance-free, rechargeable battery
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

## Mounting

- Surface mount via easy connect back plate, which fits most standard junction boxes and snaps into place making internal electrical connections
- Conduit mount using knockouts on back plate

## Housing

- Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic in white or black finish

## Illumination

- Two fully adjustable 6V, 5W MR-16 halogen lamps
- Provides 10W of remote capability


## Options

- SDT: Self-Diagnostic (option SDT) continually diagnoses unit's performance and tests system (auto battery discharge once every 30 days and once every 12 months) to ensure reliable operation and to meet electrical and life safety codes
- CP: 3 foot 3-wire cord and plug available

## Warranty

- Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years.

## Dimensions

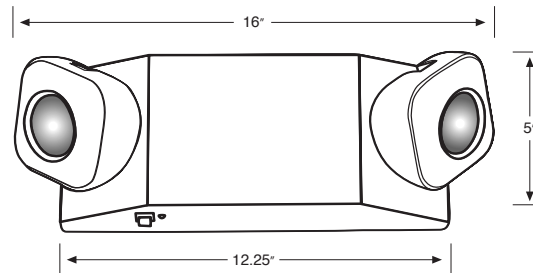

## ORDERING INFORMATION



Model	Color	Options
R-16HO	Blank - White	SDT - Self Diagnostics
	B - Black	CP - Cord & Plug
		10W - 10 Watt MR16 lamps

Model	Color	Options
-------	-------	---------