


## LED Street/Parking AL-GT-ME Series



- Vertical convection cooling structure
- Highly efficient light distribution and uniformity
- Surge protection up to 20Kva
- Easy-to-install terminal block

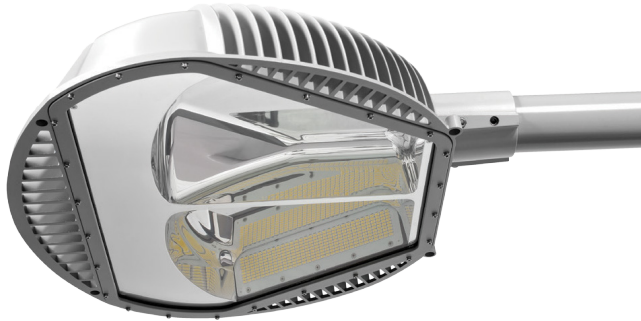

Model Name	AL-GT-ME-100-5-U	AL-GT-ME-130-5-U	AL-GT-ME-150-5-U
Mi Item #	06245456	06245457	06245458
Power Consumption	100W	130W	150W
Luminous Efficacy	> 130 lm/W	> 130 lm/W	> 130 lm/W
Luminous Flux	13,000 lm	16,900 lm	19,500 lm
Color Temperature	5000K		
Color Rendering	> 80 CRI		
Life Time Rating	> 100,000 Hours		
Input Voltage	100 - 277 VAC		
Operation Temperature	-22°F to 140°F (-30°C to 60°C)		
Size (W x L x H)	18.90" x 19.88" x 6.02"		
Weight	17.6lbs (8Kg)		

# Applications

- Parking Lots
- Highways
- Warehouses
- Airplane Hangars
- Billboards
- Sporting Facilities

Specifications are subject to change with or without notice.

 **MOTION<sup>®</sup>  
INDUSTRIES**  
*Keeping Industry in Motion*




## LED Exterior Lighting



 **MOTION<sup>®</sup>  
INDUSTRIES**  
*Keeping Industry in Motion*

Call. 800-526-9328  
Click. [www.MotionIndustries.com](http://www.MotionIndustries.com)  
Visit. Over 550 Locations  


# LED Flood Light AL-GT-MA Series

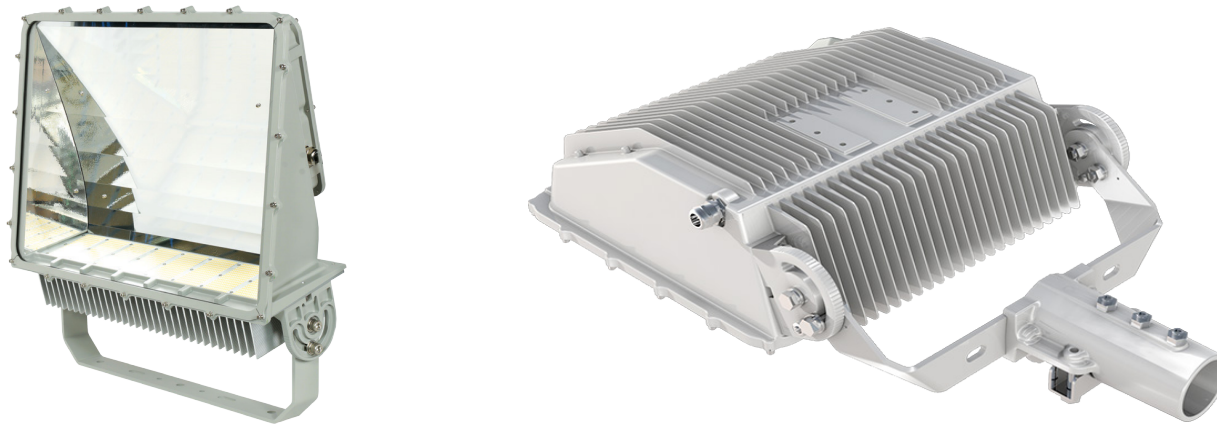

- Great light distribution and thermal design with good natural convection
- HID replacement provides up to 130 lumens per watt
- High-power LED light with middle power LED chips and reflector technology



Model Name	AL-GT-MA-200-5-U	AL-GT-MA-300-5-U	AL-GT-MA-400-5-U
Mi Item #	06245453	06245454	06245455
Power Consumption	200W	300W	400W
Luminous Efficacy	> 130 lm/W	> 130 lm/W	> 130 lm/W
Luminous Flux	26,000 lm	39,000 lm	52,000 lm
Color Temperature	5000K		
Color Rendering	> 80 CRI		
Life Time Rating	> 100,000 Hours		
Input Voltage	100 - 277 VAC   347 - 480VAC		
Operation Temperature	-22°F - 140°F (-30°C - 60°C)		
Size (W x L x H)	14.1" x 21.7" x 6.3"	18.7" x 21.7" x 6.3"	22.7" x 22.7" x 8.5"
Weight	22.1lbs (10Kg)	33.1lbs (15Kg)	44lbs (20Kg)



Call. 800-526-9328  
 Click. [www.MotionIndustries.com](http://www.MotionIndustries.com)  
 Visit. Over 550 Locations



# LED Wall Packs AL-GT-WA Series



- High quality construction, long life LED solution ensures low maintenance costs
- Easy one-for-one replacement with existing fluorescent and HID Wall packs



Model Name	AL-GT-WA-50-5-U	AL-GT-WA-75-5-U	AL-GT-WA-100-5-U
Mi Item #	06245471	06171499	06245466
Power Consumption	50W	75W	100W
Luminous Efficacy	> 125 lm/W	> 125 lm/W	> 125 lm/W
Luminous Flux	> 6,250 lm	> 9,375 lm	> 12,500 lm
Color Temperature	5000K		
Color Rendering	> 80 CRI		
Life Time Rating	> 100,000 Hours		
Input Voltage	100 - 277 VAC		
Operation Temperature	-22 °F - 140 °F (-30 °C - 60 °C)		
Size (W x L x H)	15.4" X 9.5" X 4.4"	21.8" X 10.3" X 4.0"	21.8" X 10.3" X 4.0"
Weight	7.1lbs (3.2Kg)	9.3lbs (4.2Kg)	9.3lbs (4.2Kg)