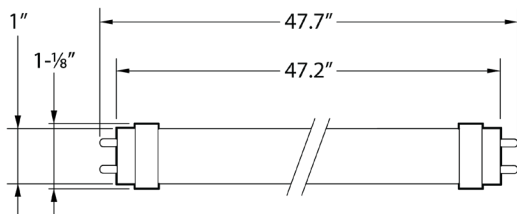


EFFICIENT LIGHTING SOLUTIONS

L32T8 Series
Linear LED Direct Replacement

Features

- Direct replacement T8 LED tube
- Environmentally friendly with no mercury
- High lumen efficiency and high CRI
- Replaces existing fluorescent T8 lamps without removing electronic ballast
- Compatible with instant-start T8 electronic ballasts
- LED 50,000 hour rated life
- 5-year limited warranty
- Suitable for damp locations
- UL Listed
- Acrylic diffuser or glass diffuser
- Use with occupancy sensors will not shorten rated life
- New Bi Pin Anti-Arch Technology prevents short circuits

Dimensional Drawings

Applications

- Ideal for food rated locations
- Manufacturing
- Warehouse
- Office Lighting
- Retail Stores
- Schools

Easy Installation

- Ensure T8 sockets are in good condition prior to installing LED T8 lamps.

1. Switch [OFF] power to the fixture
2. Remove existing fluorescent lamps
3. Install & rotate LED T8 replacement lamp
4. Switch [ON] power to the fixture

Model Name	L32T8-14-8-BC-A
Power Consumption	14 watt
Luminous Efficacy	136 lm/W
Luminous Flux	1,900 lm
Body	Acrylic or Glass
Color Temperature	5000K
Color Rendering	80 CRI
Life Time Rating	> 50,000 Hours
Input Voltage	120 - 277V, 247-480V (Ballast dependant)
Frequency	50 / 60Hz
Size (OD x L)	ø 1" x 47.7"
Weight	1.3 lb. (0.59Kg)
Optics	Glass diffuser, Acrylic diffuser, Polycarbonate diffuser
Replaces	4' Fluorescent Linear T8 bulbs or T12 (Change to Electronic T8 Ballast)

Certifications

Ordering Guide

Series	Wattage	CRI	CCT	Connection	Diffuser
L32T8	14: 14 Watts	8: 80+	50: 5,000K	BC: Ballast Compatible	A: Acrylic

Specifications are subject to change with or without notice.