

# AL-BE-WP2

## LED WALL PACK

### EFFICIENT ENERGY SOLUTIONS

#### DESCRIPTION

The AL-BE-WP2 is a premium wall pack that provides an efficient solution for lighting outdoor spaces, providing extra safety and security.


#### FEATURES

- Long lasting LED provide 141,000 hours of operation with at least 70% of initial lumen output (L70).
- Uniform illumination with no visible LED pixilation.
- Die cast aluminum housing with dark bronze, powder coat paint.
- Polycarbonate lens with seamless, silicone gasket to prevent leaks.
- Internal bubble level facilitates level installation.
- Easy installation in new construction or retrofit.



### SPECIFICATIONS

Model Name	AL-BE-WP2-36-50	AL-BE-WP2-57-50	AL-BE-WP2-77-50	AL-BE-WP2-101-50	AL-BE-WP2-119-50
Power Consumption	36 watt	57 watt	77 watt	101 watt	119 watt
Input Voltage	120 - 277V	120 - 277V	120 - 277V	120 - 277V	120 - 277V
Lumen Output	4,726 Lm	7,728 Lm	9,680 Lm	13,295 Lm	15,787 Lm
Efficacy	131 Lm/W	136 Lm/W	126 Lm/W	132 Lm/W	133 Lm/W
Color Rendering	>80 CRI	>80 CRI	>80 CRI	>80 CRI	>80 CRI
Color Temperature	4000K   5000K	4000K   5000K	4000K   5000K	4000K   5000K	4000K   5000K
Replaces	100-175W HID	175-200W HID	250-400W HID	400W HID	400W HID
Life Time Rating	141,000 hrs	141,000 hrs	141,000 hrs	141,000 Hrs	141,000 Hrs
Size (L x W x H)	14 1/4" x 9 7/8" x 9 1/4"	14 1/4" x 9 7/8" x 9 1/4"	14 1/4" x 9 7/8" x 9 1/4"	14 1/4" x 9 7/8" x 9 1/4"	14 1/4" x 9 7/8" x 9 1/4"
Weight	7.0 lbs	7.3 lbs	8.0 lbs	8.3 Lbs	8.3 Lbs

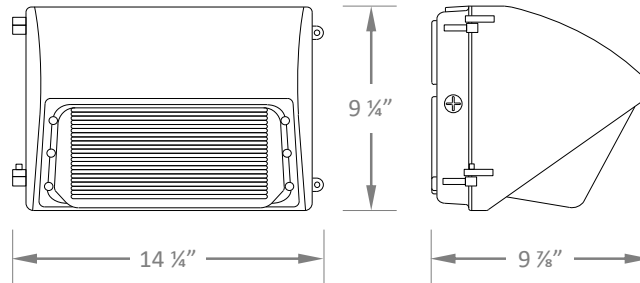

#### ORDERING GUIDE

Series	Wattage	CRI	CCT	Driver
AL-BE-WP2	36: 36W 57: 57W 77: 77W 101: 101W 119: 119W	8: >80	40: 4000K 50: 5000K	U: 120-277