

# AL-BE-WPA

## ADJUSTABLE LED WALLPACK

### DESCRIPTION

The AL-BE-WPA provides full adjustability of the LED module, so light can be focused up, down, or anything in between. It is perfect for outdoor perimeter and area lighting.

### FEATURES

- Long-life LEDs provide 61,000 hours of operation
- Die cast aluminum housing with durable, dark bronze, powder coat paint.
- Polycarbonate lens with seamless, silicone gasket to prevent leaks.
- Easy installation in new construction or retrofit




## SPECIFICATIONS


### DIMENSIONAL DRAWING



#### 25W & 40W

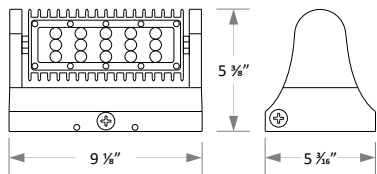

#### 60W & 80W

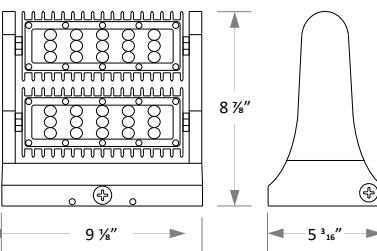

Model Name	AL-BE-WPA-25-7-50-U	AL-BE-WPA-40-7-50-U	AL-BE-WPA-60-7-50-U	AL-BE-WPA-80-7-50-U
Power Consumption	25 watt	40 watt	60 watt	80 watt
Input Voltage	120 - 277V	120 - 277V	120 - 277V	120 - 277V
Lumen Output	3,280 Lm	5,131 Lm	7,854 Lm	10,598 Lm
Efficacy	131 Lm/W	128 Lm/W	129 Lm/W	134 Lm/W
Color Rendering	>70 CRI	>70 CRI	>70 CRI	>70 CRI
Color Temperature	40 (4000K)   50 (5000K)	40 (4000K)   50 (5000K)	40 (4000K)   50 (5000K)	40 (4000K)   50 (5000K)
Replaces	175W HID	250W HID	250W-400W HID	400W HID
Life Time Rating	61,000 hrs	61,000 hrs	61,000 hrs	61,000 Hrs
Dimming	No	No	No	No
Weight	4.2 lbs	4.2lbs	6.6 lbs	6.6 Lbs
Ambient Temperature	-4° F to 113° F	-4° F to 113° F	-4° F to 113° F	-4° F to 113° F

### ORDERING GUIDE

Series	Wattage	CRI	CCT	Driver
AL-BE-WPA	25: 25W 40: 40W 60: 60W 80: 80W	7: >70	40: 4000K 50: 5000K	U: 120-277V