

AL-BE-WPC


LOW PROFILE WALL PACKS

DESCRIPTION

The AL-BE-WPA is a contemporary, commercial-grade area luminaire. It features a heavy duty, spring-loaded hinge, which provides the flexibility of focusing light near the mounting surface or projecting light forward.

FEATURES

- Watertight, compression-type electrical connectors prevent moisture intrusion.
- Durable, UV-resistant polycarbonate lens.
- Removable, threaded plugs for side attachment of 1/2" rigid electrical conduit, or for button photocells.

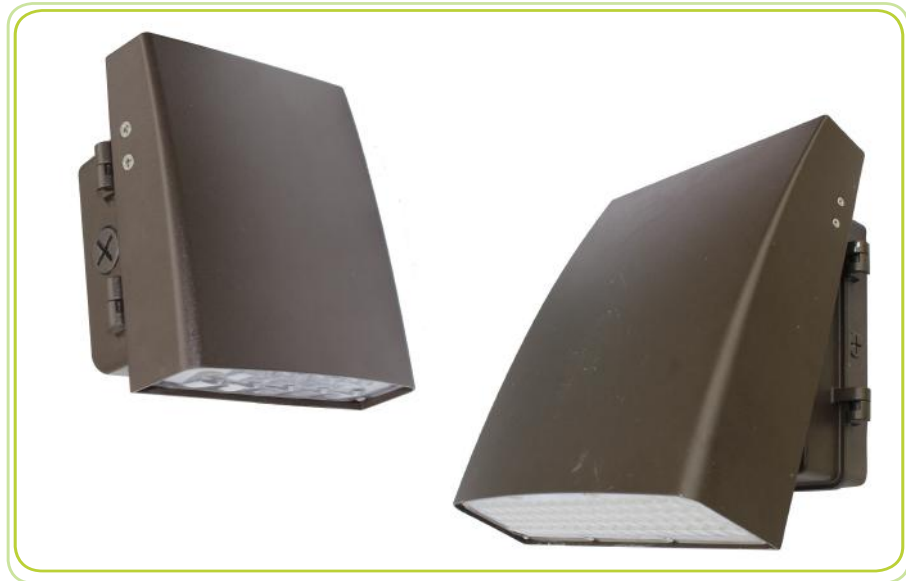

SPECIFICATIONS

Model Name	AL-BE-WPC-12-8-50-U	AL-BE-WPC-30-8-50-U	AL-BE-WPC-50-8-50-U	AL-BE-WPC-80-8-50-U	AL-BE-WPC-120-8-50-U
Power Consumption	12 watt	30 watt	50 watt	80 watt	120 watt
Input Voltage	120 - 277V	120 - 277V	120 - 277V	120 - 277V	120 - 277V
Lumen Output	1,321 Lm	3,298 Lm	5,278 Lm	9,241 Lm	14,227 Lm
Efficacy	110 Lm/W	118 Lm/W	108 Lm/W	116 Lm/W	115 Lm/W
Color Rendering	>80 CRI	>80 CRI	>80 CRI	>80 CRI	>80 CRI
Color Temperature	40 (4000K) 50 (5000K)	40 (4000K) 50 (5000K)	40 (4000K) 50 (5000K)	40 (4000K) 50 (5000K)	40 (4000K) 50 (5000K)
Replaces	100W HID	100W HID	100W HID	250W-400W HID	400W
Life Time Rating	69,000 hrs	69,000 hrs	69,000 hrs	69,000 Hrs	69,000 Hrs
Dimming	No	No	No	No	No
Weight	2.4 lbs	4.0 lbs	4.0 lbs	5.0 lbs	5.0 lbs
Operating Temp.	-4° F to 104° F	-4° F to 104° F	-4° F to 104° F	-4° F to 104° F	-4° F to 104° F


ORDERING GUIDE

Series	Wattage	CRI	CCT	Driver
AL-BE-WPC	12: 12W 30: 28W 50: 49W 80: 80W 120: 120W	8: >80	40: 4000K 50: 5000K	U: 120-277


AL-BE-WPC

LOW PROFILE WALL PACKS


DIMENSIONAL DRAWINGS

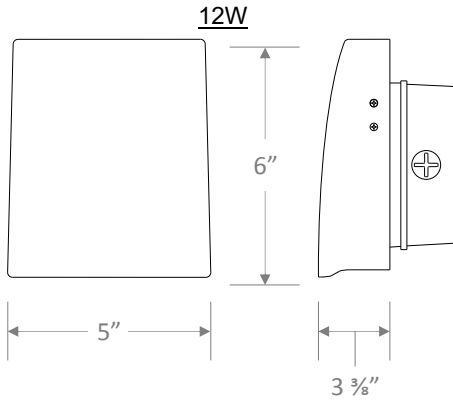

Weight: 2.4 lb.

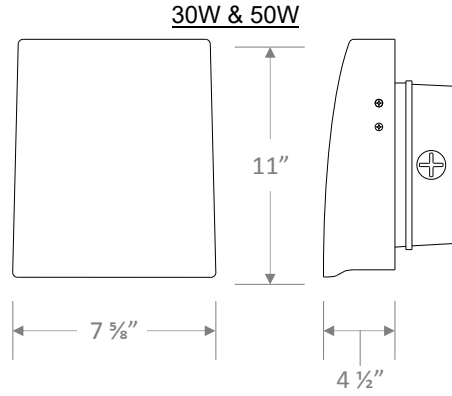

Weight: 4.0 lb.

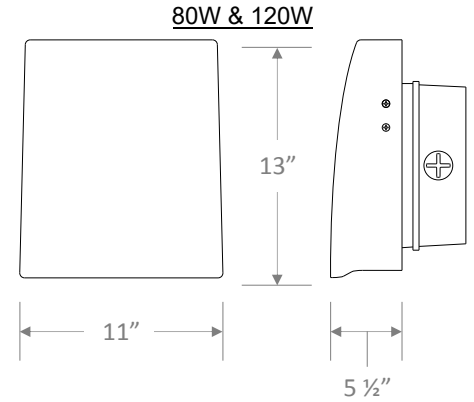

Weight: 5.0 lb.

