

AL-BE-WPF

FULL-CUTOFF WALL PACK

DESCRIPTION

The AL-BE-WPF is a rugged, durable LED wall pack that provides full cutoff (i.e., zero uplight and low glare at high angles). It is perfect for outdoor perimeter and area lighting, especially in settings requiring dark-sky compliance.


FEATURES

- Long lasting LED provide 76,000 hours of operation with at least 70% of initial lumen output (L70).
- Uniform illumination with no visible LED pixilation.
- Die cast aluminum housing with dark bronze, powder coat paint.
- Polycarbonate lens with seamless, silicone gasket to prevent leaks.
- Removable, threaded plugs for side attachment of 1/2" rigid electrical conduit, or for button photocells.
- Easy installation in new construction or retrofit.



SPECIFICATIONS

DIMENSIONAL DRAWING

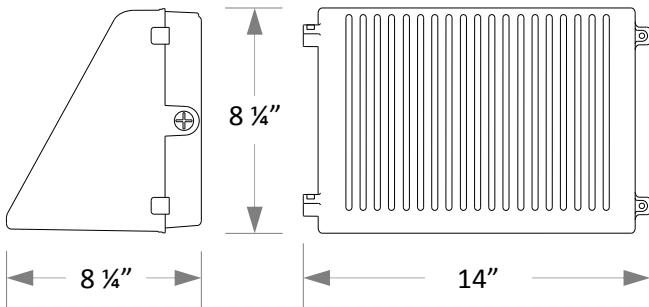

Weight: 6.8 lb.

Model Name	AL-BE-WPF-47-8-50-U	AL-BE-WPF-78-8-50-U
Power Consumption	47W	78W
Input Voltage	120 - 277V	120 - 277V
Lumen Output	5,800 Lm	9,100 Lm
Efficacy	123 lm/W	117 lm/W
Color Rendering	>80 CRI	>80 CRI
Color Temperature	40 (4000K) / 50 (5000K)	40 (4000K) / 50 (5000K)
Replaces	175-250W HID	250-400W HID
Life Time Rating	76,000 Hours	76,000 Hours
Dimming Compatible	No	No
Weight	6.8 lbs	6.8 lbs
Operating Temperature	-4° F to 104° F	-4° F to 104° F

ORDERING GUIDE

Series	Wattage	CRI	CCT	Driver
AL-BE-WPF	47: 47Watt 78: 78 Watt	8: 80+	40: 4000K 50: 5000K	U: 120-277V