



Dimensional Drawing

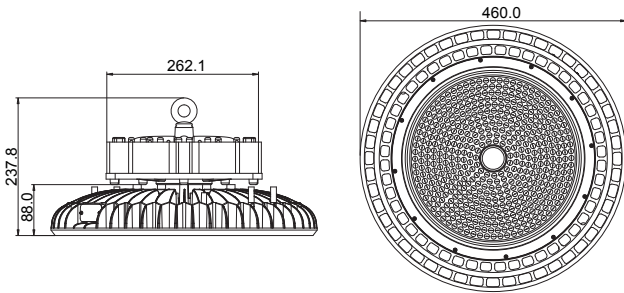

Die cast aluminum alloy body, cooling fins provide maximum heat dissipation.



Specifications

| Model Name | AL-RO-HBVT4-HT-300-8-50-U | AL-RO-HBVT4-HT-400-8-50-U | AL-RO-HBVT4-HT-500-8-50-U |
|-----------------------|----------------------------|---------------------------|---------------------------|
| Power Consumption | 300W | 400W | 500W |
| Beam Spread | 60°/90°/120° | | |
| Input Voltage | U (120-277) / HV (277-480) | | |
| Lumen Output | 39,000 Lm | 52,000 Lm | 65,000 Lm |
| Efficacy | 130 lm/W | | |
| Color Temperature | 50 (5000K) | | |
| Life Time Rating | 50,000+ Hours | | |
| Color Rendering Index | >70 | | |
| Operating Temperature | -35° C to 55° C | | |

Ordering Guide

EG: AL-RO-HBVT4-HT-400-8-50-U

| Model Name | POWER | CRI | CCT | DRIVER |
|----------------|-------------------------------------|--------|-----------|-----------------------------|
| AL-RO-HBVT4-HT | 300: 300W 400: 400W 500: 500W | 8: >80 | 50: 5000k | U (120-277) HV (277-480) |

Accessories (Order Separately)

Pendant Snap hook: AL-BE-NSFP-PSH
Stainless Steel chain: AL-BE-NSFP-CHAIN

DESCRIPTION

- Industrial Round High Bay offers the perfect solution for your lighting needs for your industrial application.

FEATURES

- Hollow heat sink design increase more airflow for better heat dissipation.
- LED and heat sink are parallel, no dark area, no shadow.
- CREE LEDs, high luminous efficiency of whole lamp up to 130LPW.
- LED junction temperature less than 85°C.
- 1-10V Dimming and motion sensor are available
- Waterproof IP65 design, suitable to damp & wet location.
- Hook hanging and bracket installation are available.
- CE/RoHS certification.
- 5 years warranty.