

# AL-LI-LINK

## LINKABLE STRIP LIGHT

### DESCRIPTION

#### Quality Construction

Extruded aluminum construction improves thermal transfer, keeping LEDs cool to increase performance and life.

**Simple, Rapid Installation.** System of bars, cords and mounting clips designed to save time and money. Link up to 40 bars with a single electrical connection.

**Controls and Sensors** for use with on / off sensors and relays only. Multiple options available


### FEATURES

- 1,600 to 3,200 lumens
- Up to 161 LPW
- Link up to 40 bars
- 180° light distribution
- Easymaintenance
- Custom lengths from 1' to 8' (2'-4' standard)
- 7 YEAR WARRANTY



## SPECIFICATIONS

### DIMENSIONAL DRAWING

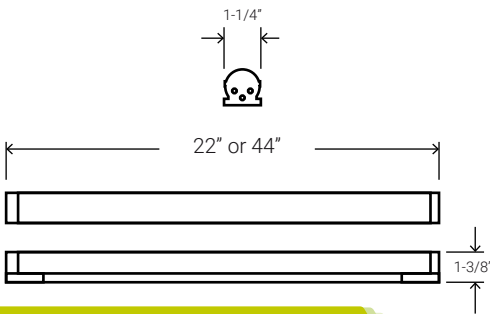

#### Model Name

**AL-LI-LINK-11-20-8-50-U**
**AL-LI-LINK-22-44-8-50-U**
**AL-LI-LINK-44-92-8-50-U**

#### Power Consumption

11w

22w

2 X 22w

#### Input Voltage

120 - 277V

120 - 277V

120 - 277V

#### Lumen Output

1,609 Lm

3,542 Lm

7,084 Lm

#### Efficacy

149 Lm/w

161 Lm/w

161 Lm/w

#### Color Rendering

&gt;80 CRI

&gt;80 CRI

&gt;80 CRI

#### Color Temperature

5000K

5000K

5000K

#### Dimensions

2 Feet

4 Feet

8 Feet

#### Warranty

7 year

7 year

7 year

#### Linking

Up to 40 Rapid Link Bars can be linked using a single electrical connection

#### Operating Temperature

-35C up to 50C

-35C up to 50C

-35C up to 50C

#### Certifications

UL, RoHS, NSF

UL, RoHS, NSF

UL, RoHS, NSF

### ACCESORIES

#### Linking Butt Connector:

**Part #:** AL-LI-LINK-BC

#### Power cords:

**Part #:**

36" cord: AL-LI-LINK-PC-36

48" cord: AL-LI-LINK-PC-48

96" cord: AL-LI-LINK-PC-96

#### Linking power cord:

**Part #:**

4" link: AL-LI-LINK-LPC-4

6" link: AL-LI-LINK-LPC-6

8" link: AL-LI-LINK-LPC-8

12" link: AL-LI-LINK-LPC-12

18" link: AL-LI-LINK-LPC-18

24" link: AL-LI-LINK-LPC-24

36" link: AL-LI-LINK-LPC-36

48" link: AL-LI-LINK-LPC-48

### ORDERING GUIDE

Series	Wattage	CRI	CCT	Driver
<b>AL-LI-LINK-11-20-8-50-U</b>	<b>11:</b> 11Wats	<b>8:</b> 80+	<b>50:</b> 5000k	<b>U:</b> 120-277V
<b>AL-LI-LINK-22-44-8-50-U</b>	<b>22:</b> 22Wats	<b>8:</b> 80+	<b>50:</b> 5000k	<b>U:</b> 120-277V
<b>AL-LI-LINK-44-92-8-50-U</b>	<b>44:</b> 44Wats	<b>8:</b> 80+	<b>50:</b> 5000k	<b>U:</b> 120-277V