




### Dimensional Drawing

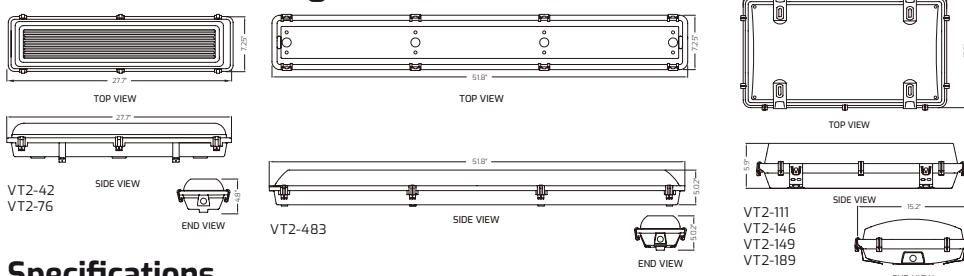

### Specifications

Model Name	VT2-42	VT2-76	VT2-83	VT2-111	VT2-146	VT2-149	VT2-189
Input Wattage (W)	42W	76W	83W	111W	146W	149W	189W
Voltage (V)	U (120-277V) / HV (480V)						
Lumen Output (lm)	5,882 lm	12,065 lm	12,112 lm	18,275 lm	24,419 lm	24,355 lm	30,782 lm
Efficacy (lm/W)	142 lm/W	158 lm/W	147 lm/W	163 lm/W	168 lm/W	163 lm/W	163 lm/W
Color Rendering Index	80+ CRI						
Color Temperature	40 (4000K) / 50 (5000K)						
Dimming Compatible	Yes						
Dimensions	4.8" x 27.7" x 7.25"		3.5" x 50" x 4.5"		15.2" x 27.3" x 4.8"		
Lens Cover	CL Clear Lens / FL Frosted Lens						
Longevity (L70)	89,000 hours			200,000 hours			
Cert/Listings	DLC, ETL, RoHS						

### Ordering Guide

EG: AL-EB-VT2-42-8-40-U-CL

Model Name	Wattage	CRI	CCT	Driver	Lens
AL-EB-VT2	42: 42 Watts	8: >80	40: 4000k	U: Universal 120-277V HV: 480V	CL: Clear Lens FL: Frosted Lens
	76: 76 Watts		50: 5000k		
	83: 83 Watts				
	111: 111 Watts				
	146: 146 Watts				
	149: 149 Watts				
189: 189 Watts					

The improved AL-BE-VT2 Series features LED low bay and high bay fixtures for use in demanding environments requiring vapor tight seals..

### FEATURES

- ETL listed (UL 1598), CSA 22.2
- DesignLights™ Consortium (DLC) Premium Listed
- Suitable for wet location. Covered ceiling not required to maintain wet location listing or IP ratings
- NSF/ANSI STD2
- IP65, IP66, IP67 and IP69K rated and certified to meet NSF
- Splash Zone 2
- NEMA 4X rated
- IK07 rated
- EMI: Title 47 CFR 15 Class A, ICES-005
- RoHS compliant
- LM-79, LM 80 and TM-21 tests and reports are performed in accordance to IESNA standards, per TM-21