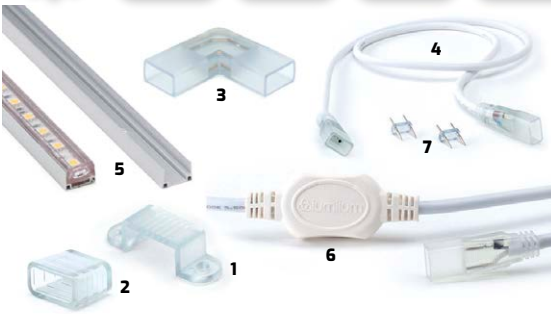


**AL-RO-RL-HLO**

**Product Accessories**


<b>1 Model Name</b>	<b>AL-RO-RL-MC-HLO</b>
Item Name	Mounting Bracket
<b>2 Model Name</b>	<b>AL-RO-RL-EC-HLO</b>
Item Name	End Caps (Set of 2)
<b>3 Model Name</b>	<b>AL-RO-RL-LC-HLO</b>
Item Name	L Connector (LUM-120 505AC 90°)
<b>4 Model Name</b>	<b>AL-RO-RL-IC6-HLO</b>
Item Name	Inter-Connector Cable 6" 12" 20" 40"
<b>5 Model Name</b>	<b>AL-RO-RL-AUC-4-HLO</b>
Item Name	Aluminum U Channel 4ft
<b>6 Model Name</b>	<b>AL-RO-RL-PC-HLO</b>
Item Name	Power Plug with Rectifier
<b>7 Model Name</b>	<b>AL-RO-RL-CP-HLO</b>
Item Name	Connecting Pin

**Specifications**

Model Name	AL-RO-RL
Length	164ft spool (50 meters)
Input Wattage (W)	6W per foot
Voltage (V)	120V
Lumen Output (lm)	700 lm/ft
Efficacy (lm/W)	116 lm/W
Color Rendering Index	90+ CRI
Color Temperature	2200K   2700K   3000K   4000K   5500K
Dimming Compatible	Yes
Longevity (L70)	50,000 hours
Certifications/Listings	CSA, IP65, DLC

**DESCRIPTION**

This Line Voltage (120V) LED Strip Light requires no power adapters or drivers, instead it uses a rectifier that converts AC into DC Current. The light source in the LED strip consists of 3,300 equally distributed high brightness SMD 5050 chips per 164ft. spool which come in incremental segments of 12 inches (1ft). The light output is bright and crisp with a (Color Rendering Index) CRI > 90.

**FEATURES**

- 164ft spool (50 meters)
- Input: 120 Volts
- Dimmable
- CRI > 90
- 4.0 Watts/ft
- 50,000+ Hours Rated Life
- Outdoor / Indoor rated

**Ordering Guide**

EG: AL-RO-RL-9-55

Model Name	CRI	CCT
AL-RO-RL	9: >90	22: 2200k
		27: 2700k
		30: 3000k
		40: 4000k
		55: 5500k


**Abaco Lighting, Inc.**

 2411 NW 16th Ln. #5 | Pompano Beach, FL 33064  
 Office: 877-377-4123 www.abacolighting.com