

AL-CCV SERIES

Wet Location LED Corncob Lights

DESCRIPTION

Ideal for replacing existing High Intensity Discharge (HID) lamps: Metal Halide, High Pressure Sodium, and Mercury Vapor lamps.


FEATURES

- Isolated driver and hollow aluminum heat sink for improved airflow
- Approved for totally enclosed fixtures
- IP64 rated, dust tight and wet locations
- Very low energy consumption, low thermal output
- Ballast-free operation only
- Easy installation, 120-277V | Not suitable for dimmers
- Simple installation, screw into existing HID sockets
- UV (Ultra-Violet) and IR (Infra-Red) free
- 100% Mercury free



SPECIFICATIONS

DIMENSIONAL DRAWING

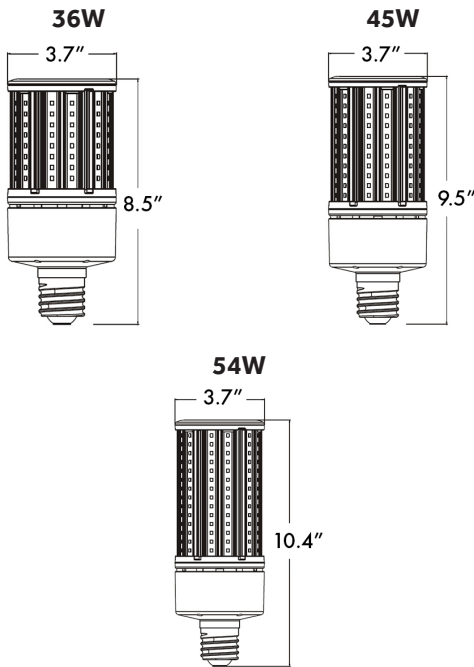

Model Name	AL-CCV-36W	AL-CCV-45W	AL-CCV-54W
Power Consumption	36 watt	45 watt	54 watt
Input Voltage	120 - 277V, 480V**	120 - 277V, 480V**	120 - 277V, 480V**
Lumen Output	4,680 Lm	5,850 Lm	7,020 Lm
Efficacy	130 Lm/W	130 Lm/W	130 Lm/W
Color Rendering	>80 CRI	>80 CRI	>80 CRI
Color Temperature	4000K 5000K	4000K 5000K	4000K 5000K
Replaces	175W-250W HID	250W HID	250W HID
Life Time Rating	50,000 hrs	50,000 hrs	50,000 hrs
Size (ØD x H)	3.7" x 8.3"	3.7" x 9.3"	3.7" x 10.2"
Weight	1.7 lbs	1.7 lbs	2 lbs
Ambient Temperature	-40° F to 140° F	-40° F to 140° F	-40° F to 140° F
Base Configuration	Medium or Mogul Base*	Medium or Mogul Base*	Medium or Mogul Base*

*DLC Qualified only applies to mogul base option
 **480V utilizing step down transformer

ORDERING GUIDE

Series	Wattage	CRI	CCT	Base
AL-CCV	36: 36 watt 45: 45 watt 54: 54 watt	8: >80	40: 4000K 50: 5000K	MED: Medium MOG: Mogul